


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 22 TOWNSHIP 14 RANGE 4
DATE: ~~12-07-03~~ 2-29-08
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 4-24-00

IN. S.P.C. E ZONE NAD '83

NAME: 14042204
N: 488052.9681(m)
E: 64293.2096(m)

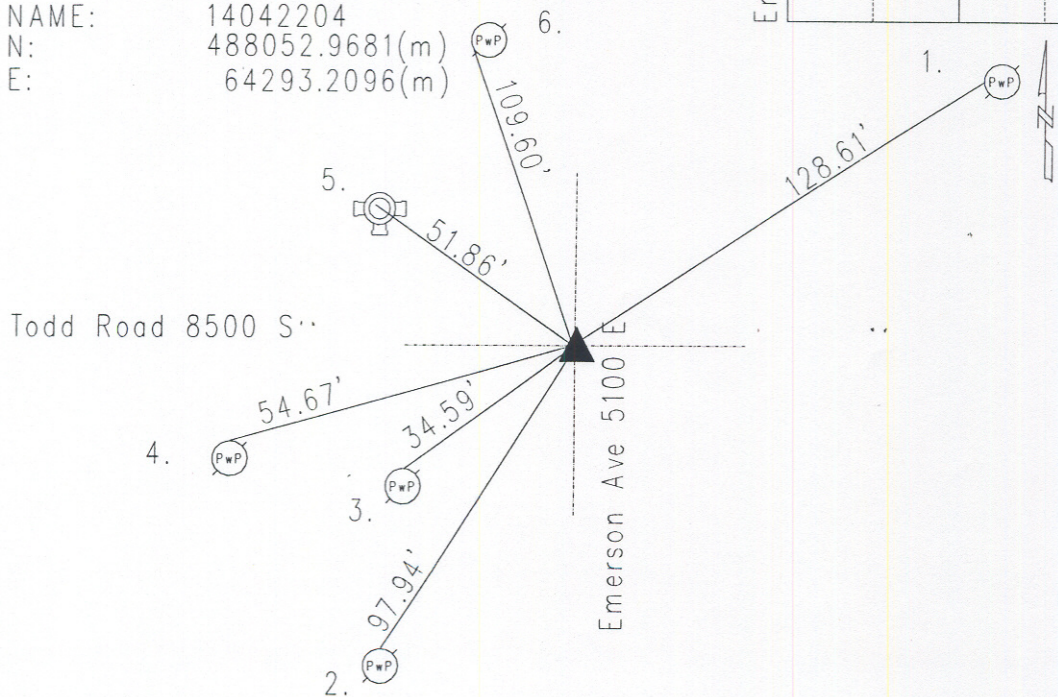

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 15" beech bearing south 67 degrees, thence west 37 links, and a 10" dogwood bearing north 68 degrees, thence east 13 links.(M.C. Atlas p. 9) A survey by Percy Hasbrook on November 10,1849 indicates no stone but both original witnesses.(Franklin Legal Book p.26) Corner referenced by MCS in 1950 and called a stone. Corner referenced by MCS in 1950s and called a stone. Corner referenced by Greene on 5/21/87 and called a p. k. nail. Corner referenced by Wilcoxon on 11/29/99 and called a p.k. nail. Corner referenced by Wilcoxon on 4/24/00 and called a mag nail. Corners excavated on 12/01/03 and no points were found. A #205 cast iron Harrison Monument was set in position as the corner.

14042204

REF.	DISTANCE	DESCRIPTION
1.	128.61'	PK nail W PwP#28-794 36"up
2.	87.94'	Mag nail w/brass washer N PwP no# 6"up
3.	34.59'	Mag nail w/brass washer N PwP no # 6"up
4.	54.67'	Mag nail w/brass washer N PwP#23-823 12"up
5.	51.86'	Top nut of fire hydrant
6.	109.60'	Mag nail w/brass washer W PwP#41-793 12"up